

5123 Ivy Court
Wilson, NC 27893 USA
252-243-4006 252-243-0298 Fax


www.EvansMachinery.com

Limeloader Conveyor



Features & Specifications

- Conveyor discharge height from ground level: 14 feet
- Discharge rate is 2-3 tons per minute
- Standard power unit: 20 HP electric with close coupled hydraulic pump
- Drive Roller: 12" x 24" lagged with 1-15/16" shaft
- Lower Take-Up Roller: 9-1/2" x 24" slatted with 1-15/16" shaft
- Each roller adjustable by means of 1-15/16" take-up bearings
- Conveying Inlet and Return Rollers: 4" x 24" steel rollers
- Troughing rollers: 4" x 24" steel rollers
- Belting: 350 weight PVC x 24" width laced with alligator lacing
- Conveyor Frame: 6" structural channel
- Axle: Heavy duty center tubing with 6 on 6 hubs and 15" tires
- Operation: 1 spool detent control valve with flow regulating valve

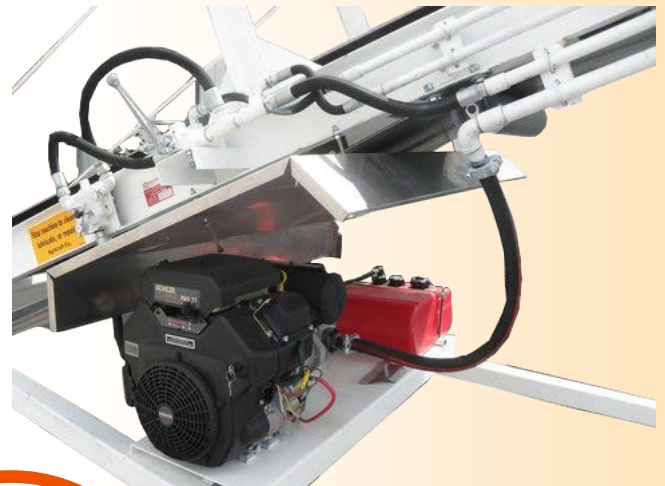

Michael Randolph
Agricraft Parts Sales
252-243-4006 Ext. 244
mrandolph@evansmachinery.com

Jeff Ingram
Agricraft Outside Sales
919-273-0320
jingram@evansmachinery.com

Jereme Pelt
Agricraft Parts Sales
252-243-4006 Ext. 244
jpelt@evansmachinery.com